




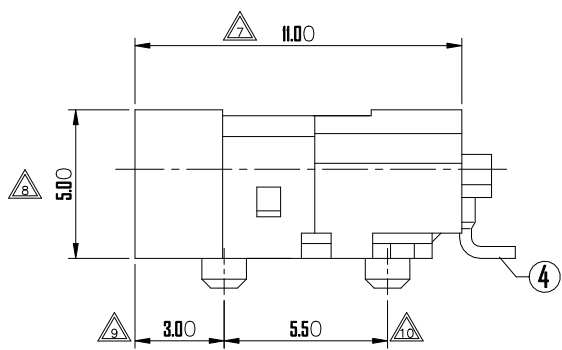


Level-1 Controlled Substances are banned

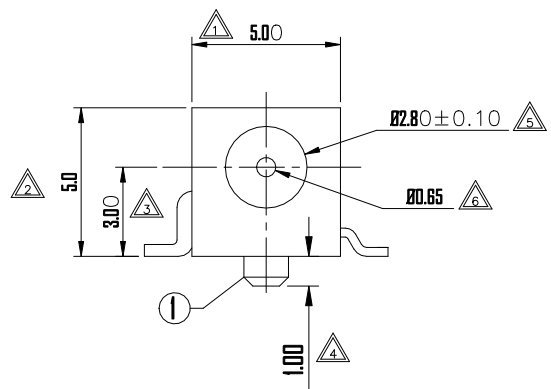


P.C.B LAYOUT
TOP VIEW

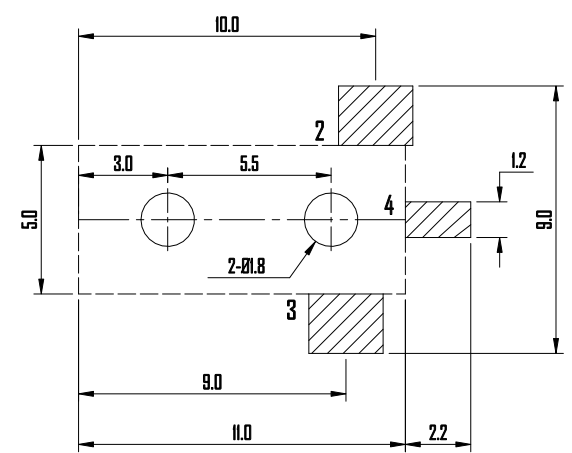

SPECIFICATION
 1.Rating : DC 30V 1.0A;
 2.Contact resistance: $\leq 0.03\Omega$;
 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
 4.Withstand voltage: 500VAC ;
 5.Insertion and extraction force: 3-30N;
 6.life test: 5,000 cycles.
 7.Marked \triangle are important dimensions.

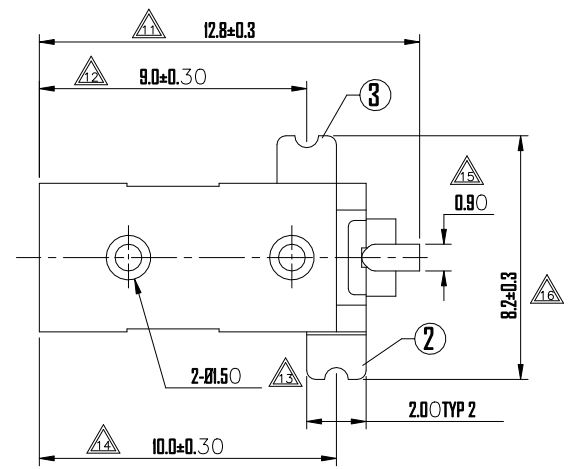

SCHEMATIC



NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
4	PIN	1	BRONZE	—	Ag-Plating
3	SPRING	1	SUS301	—	Ag-Plating
2	FLAT PIECE	1	BRASS	—	Ag-Plating
1	HOUSING	1	PBT	—	—



GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED		CUSTOMER COPY	TITLE: DC-JACK
General	Angle		
X ± 0.50	X ° ± 3°	PART NO.	DJ-S011B
X.X ± 0.30	X.X ° ± 2°		
X.XX ± 0.20	X.XX ° ± 1°		
X.XXX ± 0.10		UNIT:mm	SIZE: A4
PROJ:	SCALE: 4:1		SHEET: 1 OF 1

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.
	0	14'/04/12	NEW	Steven	Max.hu