



P.C.B LAYOUT
TOP VIEW

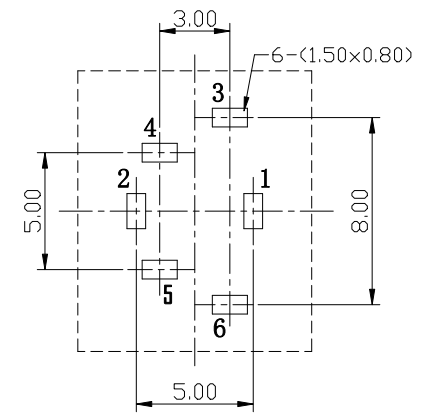

SPECIFICATION
 1.Rating : DC 30V 0.5A;
 2.Contact resistance: ≤0.03Ω;
 3.Insulation resistance: ≥100MΩ (DC250V);
 4.Withstand voltage: 500VAC ;
 5.Insertion and extraction force: 3-30N;
 6.life test: 5,000 cycles.
 7.Marked Δ are important dimensions.

SCHEMATIC



8	COVER	1	PBT	—	—
7	HOUSING	1	PBT	—	—
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
4	4# CONTACT FOOT	1	BRASS	—	Ag-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED		盛聰电子有限公司 SHENG CONG ELECTRONIC CO.,LTD		CUSTOMER COPY	TITLE: PHONE JACK
General	Angle				
X ± 0.50	X ° ± 3°	SCALE: 4:1	UNIT:mm	SIZE: A4	SHEET: 1 OF 1
X.X ± 0.30	X.X ° ± 2°				
X.XX ± 0.20	X.XX ° ± 1°	PROJECT:			
X.XXX ± 0.10					

DESIGN	Jason	12'/05/07			
CHECK	Jason	12'/05/07			
APPRO.	Max.hu	12'/05/07			
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.
	0	12'/05/07	NEW	JASON	Max.hu