



P.C.B LAYOUT  
TOP VIEW

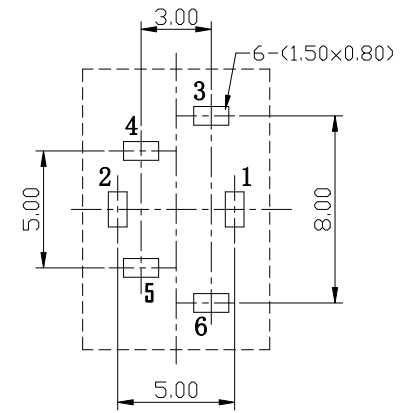

**SPECIFICATION**  
 1.Rating : DC 30V 0.5A;  
 2.Contact resistance:  $\leq 0.03\Omega$ ;  
 3.Insulation resistance:  $\geq 100M\Omega$  (DC250V);  
 4.Withstand voltage: 500VAC ;  
 5.Insertion and extraction force: 3-30N;  
 6.life test: 5,000 cycles.  
 7.Marked  $\triangle$  are important dimensions.

SCHMATIC



8	COVER	1	PBT	—	—
7	HOUSING	1	PBT	—	—
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
4	4# CONTACT FOOT	1	BRASS	—	Ag-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

<b>GENERAL TOLERANCE</b> UNLESS OTHERWISE SPECIFIED		<b>盛聰电子有限公司</b> SHENG CONG ELECTRONIC CO.,LTD	
General	Angle		
X ± 0.50	X ° ± 3°	PART NO.	PJ-D3097
X.X ± 0.30	X.X ° ± 2°		
X.XX ± 0.20	X.XX ° ± 1°	SIZE: A4	SHEET: 1 OF 1
X.XXX ± 0.10			

						DESIGN	Jason	12'/05/07	
						CHECK	Jason	12'/05/07	
	0	12'/05/07	NEW	JASON	Max.hu	APPRO.	Max.hu	12'/05/07	
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.				