



Pb RoHS
Process Capable Compliant
Level-I Controlled Substances are banned

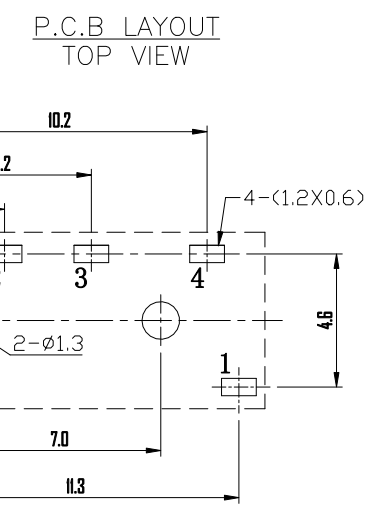

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.
7. Marked \triangle are important dimensions.

5	HOUSING	1	PBT	—	—
4	CONTACT FOOT	1	PHOSPHOR BRONZE	—	Sn-Plating
3	CONTACT FOOT	1	PHOSPHOR BRONZE	—	Sn-Plating
2	CONTACT FOOT	1	PHOSPHOR BRONZE	—	Sn-Plating
1	SPRING	1	PHOSPHOR BRONZE	—	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

盛聰电子有限公司
SHENG CONG ELECTRONIC CO.,LTD

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED

General	Angle
X ± 0.50	X ° ± 3°
X.X ± 0.30	X.X ° ± 2°
X.XX ± 0.20	X.XX ° ± 1°
X.XXX ± 0.10	

PROJ:

CUSTOMER COPY	TITLE: PHONE JACK
PART NO.	PJ-D3020A
SCALE: 4:1	UNIT:mm
SIZE: A4	SHEET: 1 OF 1

DESIGN	Steven	12'/06/07			
CHECK	Jason	12'/06/07			
APPRO.	Max.hu	12'/06/07			
ECN(OCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.
	0	12'/06/07	NEW		Steven Max.hu